


I2-40 (oil-lubricated)

Voltage	V	100	100	120	200	200	230	230				
Frequency	Hz	50	60	60	50	60	50	60				
Motor	HP	1.08	1.08	1.08	0.92	0.92	0.92	0.92				
	kW	0.80	0.80	0.80	0.68	0.68	0.68	0.68				
Displacement	l/min	100	120	120	100	120	100	120				
	CFM	3.53	4.24	4.24	3.53	4.24	3.53	4.24				
FAD @ 8 bar	l/min	64	74	74	64	74	64	74				
	CFM	2.26	2.61	2.61	2.26	2.61	2.26	2.61				
Max. pressure ¹⁾	bar	8	8	8	8	8	8	8				
	psi	120	120	120	120	120	120	120				
Max. current	A	12.4	12.4	12.4	5.8	5.8	5.8	5.8				
Tank size	litres	40	40	40	40	40	40	40				
	gallon	10.6	10.6	10.6	10.6	10.6	10.6	10.6				
Weight	kg	48	48	48	48	48	48	48				
	lbs	106	106	106	106	106	106	106				
Noise level	dB(A)/1m	48	48	48	48	48	48	48				
Thermal protection		Yes	Yes	Yes	Yes	Yes	Yes	Yes				
Duty cycle		50%	50%	50%	50%	50%	50%	50%				

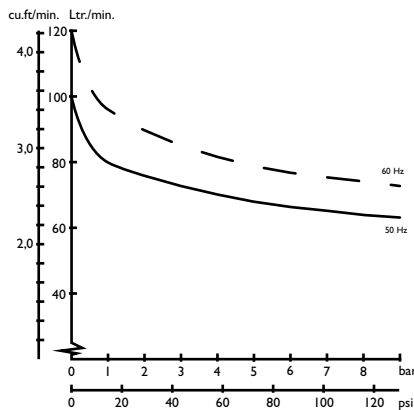

Dimensions (l x w x h)
420 x 540 x 585 mm / 16 1/8 x 21 1/8 x 23 inch

¹⁾ Higher pressure available upon request

Technical modifications reserved

JUN-AIR[®]



Advanced Technical Services Ltd
Ph: 03 377 4793 / 027 577 4793
Fax: 03 377 4794

email: sales@advancedtechnical.co.nz www.advancedtechnical.co.nz