


# 6-25 (oil-lubricated)

Voltage	V	100	100	120	200	200	230	230				
Frequency	Hz	50	60	60	50	60	50	60				
Motor	HP	0.54	0.54	0.54	0.46	0.46	0.46	0.46				
	kW	0.40	0.40	0.40	0.34	0.34	0.34	0.34				
Displacement	l/min	50	60	60	50	60	50	60				
	CFM	1.77	2.12	2.12	1.77	2.12	1.77	2.12				
FAD @ 8 bar	l/min	32	37	37	32	37	32	37				
	CFM	1.13	1.31	1.31	1.13	1.31	1.13	1.31				
Max. pressure <sup>1)</sup>	bar	8	8	8	8	8	8	8				
	psi	120	120	120	120	120	120	120				
Max. current	A	6.2	6.2	6.2	2.9	2.9	2.9	2.9				
Tank size	litres	25	25	25	25	25	25	25				
	gallon	6.6	6.6	6.6	6.6	6.6	6.6	6.6				
Weight	kg	29	29	29	29	29	29	29				
	lbs	64	64	64	64	64	64	64				
Noise level	dB(A)/1m	45	45	45	45	45	45	45				
Thermal protection		Yes	Yes	Yes	Yes	Yes	Yes	Yes				
Duty cycle		50%	50%	50%	50%	50%	50%	50%				

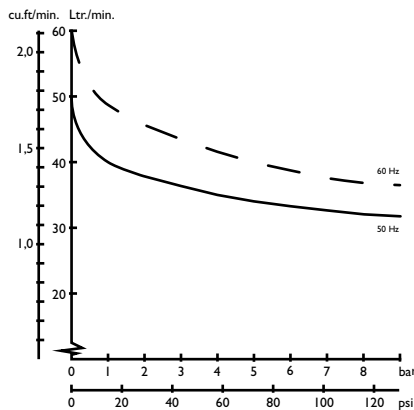

Dimensions (l x w x h)  
380 x 380 x 550 mm / 15 x 15 x 21 5/8 inch

<sup>1)</sup> Higher pressure available upon request

Technical modifications reserved

## JUN-AIR®



Advanced Technical Services Ltd  
Ph: 03 377 4793 / 027 577 4793

Fax: 03 377 4794

email: [sales@advancedtechnical.co.nz](mailto:sales@advancedtechnical.co.nz) [www.advancedtechnical.co.nz](http://www.advancedtechnical.co.nz)